


Mendota DXV (DXV35 DT3) Direct Vent Gas Fireplace Specifications

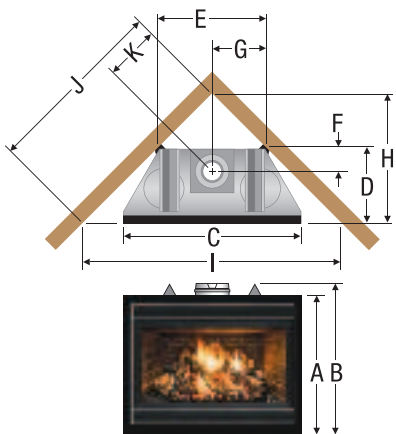

DXV35 DT3	
A	29"
B	31-1/2"
C	36"
D	15-1/2"
E	22-1/4"
F	5"
G	11-1/8"
H	26-7/16"
I	52-7/8"
J	37-1/2"
K	11-3/16"

Specifications		
BTUH	Hi 33,000	Lo 10,000
Efficiency	Thermal up to 86.4% Steady State 78.5%	
Gas Supply	Natural or LP	
Vent Size	4" Exhaust 6-5/8" Intake (Coaxial)	
Safety System	AGA Certified Pilot Generator Millivolt System Activated with Switch, Thermostat or Remote Control	
Safety Tested	Intertek to CGA/AGA/ANSI Standards	
Weight	185 lbs.	

Minimum Framing Dimensions:

37-1/8" Wide x 31-1/2" High x 16" Deep

Finished Opening Dimensions:

36" Wide x 31-1/2" High x 15-1/2" Deep

Standard Equipment:

Two tube burners, premium fiber log set, grate, embers & coals, AGA certified safety system, IPI electronic ignition, two blowers, neo-ceram glass, FireLight accent lighting, Antique Red Firebrick interior lining.

Options:

Mendota fronts & doors; remote control with flame & fan modulation & accent lighting control.



Mendota's environmentally friendly, sealed combustion, direct vent fireplaces with the BurnGreen™ system are designed to meet exacting governmental EPA standards, as well as national LEED® and NAHB guidelines for high efficiency and low emissions.



Add the optional remote control and adjust your Mendota fireplace with just a touch of a button, without ever leaving your favorite chair.

