

Specifications	
BTUH	FV33i - Hi 31,000 Lo 10,000 FV44i - Hi 40,000 Lo 15,300
Efficiency	Up to 86.3%
Gas Supply	Natural or LP
Vent Size	3" Intake, 4" Exhaust
Safety System	AGA Certified IPI Auto Electronic Ignition System Activated with Thermostatic Remote Control
Safety Tested	Intertek to CGA/AGA/ANSI Standards
Weight	FV33i - 175 lbs. FV44i - 200 lbs.

Standard Equipment:

One ceramic plaque burner & one tube burner* (back burner turn-off from remote control), premium fiber log set, grate, embers & coals, AGA certified safety system, IPI electronic ignition, two blowers, remote control with flame & fan modulation & accent lighting control, FireLight accent lighting. *FV33i has two tube burners.

Options:


Mendota fronts & doors; Three sizes faceplate surrounds & an arched faceplate surround; Custom sized faceplate surrounds; Black Porcelain Reflective & Red Soldier Course Brick interior linings.*

***You must select an interior lining to operate the unit. Check with your dealer for colors and availability.




Mendota's environmentally friendly, sealed combustion, direct vent fireplaces with the BurnGreen™ system are designed to meet exacting governmental EPA standards, as well as national LEED® and NAHB guidelines for high efficiency and low emissions.

Products, specifications and prices subject to change without notice. Consult our Owner's Manual for all final dimensions. Mendota products are manufactured in the U.S.A.

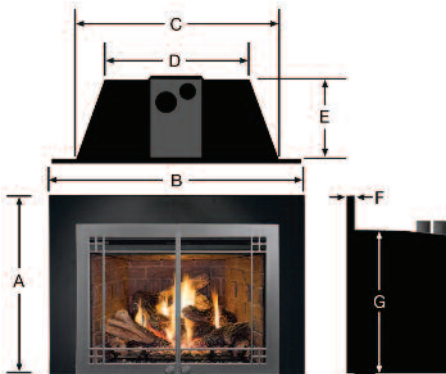

Shown with Homestead doors in Vintage Iron



Shown with Andover doors in Black

FV33i		
A	24"	27" 31"
B	36"	40" 44"
C	30-5/16"	
D	22-1/4"	
E	15-5/8"	
F	1-3/4"	
G	18-1/4"	

Minimum Fireplace Opening Requirements

for FV33i & FV44i Inserts:

FV33i: 30-3/16" Wide x 18-3/8" High x 15-3/4" Deep
FV44i: 34" Wide x 24" High x 17" Deep

FV33i Andover Arched Faceplate

H-28-7/8" I-40-1/4" J-24-7/8" RADIUS-52-11/32"

FV33i Bentley Arched Faceplate

H-28-7/8" I-40-1/4" J-22-7/8" RADIUS-36-7/8"

FV44i Andover & Bentley Arched Faceplate

H-33-3/8" I-44" J-27-3/8" RADIUS-43-1/32"

FV44i		
A	31"	33" 36"
B	44"	48" 52"
C	34"	
D	24"	
E	16-3/8"	
F	1-3/4"	
G	23-3/4"	