

# Mendota FullView Modern FV41m Direct Vent Gas Fireplace Specifications

FV41m	
A	47"
B	48"
C	42-1/2"
D	18"
E	19-1/2"
F	42-1/2"
G	9"
H	42-1/2"
I	72"

Specifications	
BTUH	Hi 29,000 Lo 18,000
Efficiency	Exceeds D.O.E. Efficiency Requirements (A.F.U.E.) for Direct Vent Wall Heaters. A.F.U.E.: 68.0% NG, 71.2% LPG P4: 73.9% NG, 80.2% LPG
Gas Supply	Natural or LP
Vent Size	5" Exhaust, 8" Intake (Coaxial)
Safety System	AGA Certified IPI Auto Electronic Ignition System Activated with Thermostatic Remote Control
Safety Tested	Intertek to CGA/AGA/ANSI Standards
Weight	225 lbs.

## Rough Framing Dimensions:

42-1/2" Wide x 47" High x 19-1/2" Deep

## Standard Equipment:

One ceramic plaque burner, AGA certified safety system, IPI electronic ignition, remote control with flame modulation & accent lighting control, FireLight accent lighting.



## Options:

Mendota fronts & doors; Clear Ice Cubes, Natural River Rock, Midnight Black Glass, Liquid Clear Glass & White Tumbled Marble fire base; Black Non-Reflective, Black Porcelain Reflective & Silver Porcelain Reflective interior linings; blower.

\*You must select an interior lining to operate the unit. Check with your dealer for colors and availability.



Mendota's environmentally friendly, sealed combustion, direct vent fireplaces with the BurnGreen™ system are designed to meet exacting governmental EPA standards, as well as national LEED® and NAHB guidelines for high efficiency and low emissions.

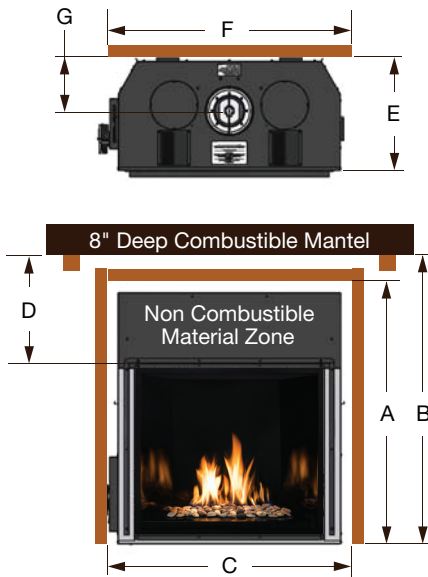

Products, specifications and prices subject to change without notice. Consult our Owner's Manual for all final dimensions. Mendota products are manufactured in the U.S.A.

