


Mendota FullView (FV33i & FV44i) Direct Vent Gas Fireplace Insert Specifications



Shown with Homestead doors in Vintage/Natural Iron

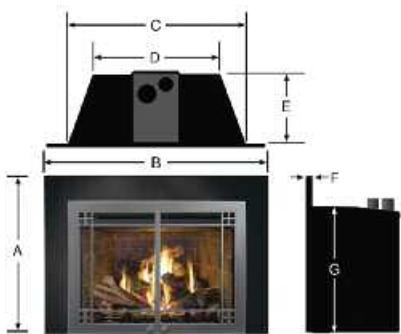

Shown with Andover doors in Black

	FV33i		
A	24"	27"	31"
B	36"	40"	44"
C	30-5/16"		
D	22-1/4"		
E	15-5/8"		
F	1-3/4"		
G	18-1/4"		

	FV44i		
A	31"	33"	36"
B	44"	48"	52"
C	34"		
D	24"		
E	16-3/8"		
F	1-3/4"		
G	23-3/4"		

Minimum Fireplace Opening Requirements for FV33i & FV44i Inserts:

FV33i: 30-3/16" Wide x 18-3/8" High x 15-3/4" Deep
FV44i: 34" Wide x 24" High x 17" Deep

FV33i Andover Arched Faceplate

H-28-7/8" I-40-1/4" J-24-7/8" RADIUS-52-11/32"

FV33i Bentley Arched Faceplate

H-28-7/8" I-40-1/4" J-22-7/8" RADIUS-36-7/8"

FV44i Andover & Bentley Arched Faceplate

H-33-3/8" I-44" J-27-3/8" RADIUS-43-1/32"

Products, specifications and prices subject to change without notice. Consult our Owner's Manual for all final dimensions. Mendota products are manufactured in the U.S.A.



Specifications	
BTUH	FV33i - Hi 31,000 Lo 10,000 FV44i - Hi 40,000 Lo 15,300
Efficiency	Up to 86.3%
Gas Supply	Natural or LP
Vent Size	3" Intake, 4" Exhaust
Safety System	AGA Certified IPI Auto Electronic Ignition System Activated with Thermostatic Remote Control
Safety Tested	Intertek to CGA/AGA/ANSI Standards
Weight	FV33i - 175 lbs. FV44i - 200 lbs.

Standard Equipment:

One ceramic plaque burner & one tube burner* (back burner turn-off from remote control), premium fiber log set, grate, embers & coals, AGA certified safety system, IPI electronic ignition, two blowers, remote control with flame & fan modulation & accent lighting control, FireLight accent lighting, Red Soldier Course Brick interior lining.
*FV33i has two tube burners.

Options:

Mendota fronts & doors; Three sizes faceplate surrounds and an arched faceplate surround; Custom sized faceplate surrounds; Black Porcelain Reflective interior lining.