




# Mendota FullView (FV41) Direct Vent Gas Fireplace Specifications

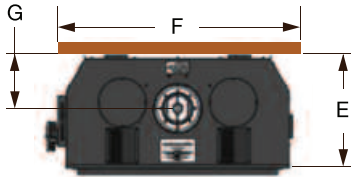

Visible Glass Frame:  
31-1/2" Wide x 28-1/32" High

Finished Opening Dimensions:  
32-3/8" Wide x 28-1/2" High

Finished Opening Dimensions  
(Willow & Homestead Doors):  
34-5/16" Wide x 29-7/16" High

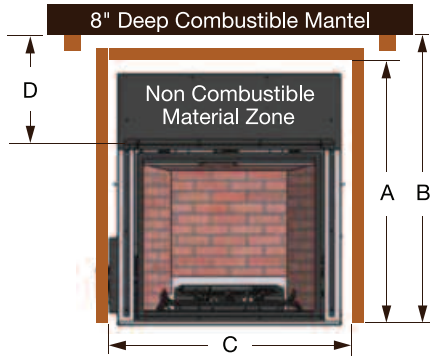

FV41	
A	47"
B	48"
C	42-1/2"
D	18"
E	19-1/2"
F	42-1/2"
G	9"
H	42-1/2"
I	72"

Specifications	
BTUH	Hi 40,000 Lo 13,000
Efficiency	Exceeds D.O.E. Efficiency Requirements (A.F.U.E.) for Direct Vent Wall Heaters
Gas Supply	Natural or LP
Vent Size	5" Exhaust, 8" Intake (Coaxial)
Safety System	AGA Certified IPI Auto Electronic Ignition System Activated with Thermostatic Remote Control
Safety Tested	Intertek to CGA/AGA/ANSI Standards
Weight	225 lbs.

## Standard Equipment:

One ceramic plaque burner & one tube burner (back burner turn-off from remote control), premium fiber log set, grate, embers & coals, AGA certified safety system, IPI electronic ignition, two blowers, remote control with flame & fan modulation & accent lighting control, FireLight accent lighting, Red Soldier Course Brick or Natural Aged Herringbone interior lining.

## Options:

Mendota fronts & doors; Limestone Brick & Black Porcelain Reflective interior linings; Classic andirons.

Products, specifications and prices subject to change without notice. Consult our Owner's Manual for all final dimensions. Mendota products are manufactured in the U.S.A.

